




GRAVITY DRIVEN TAPPER ROLLER

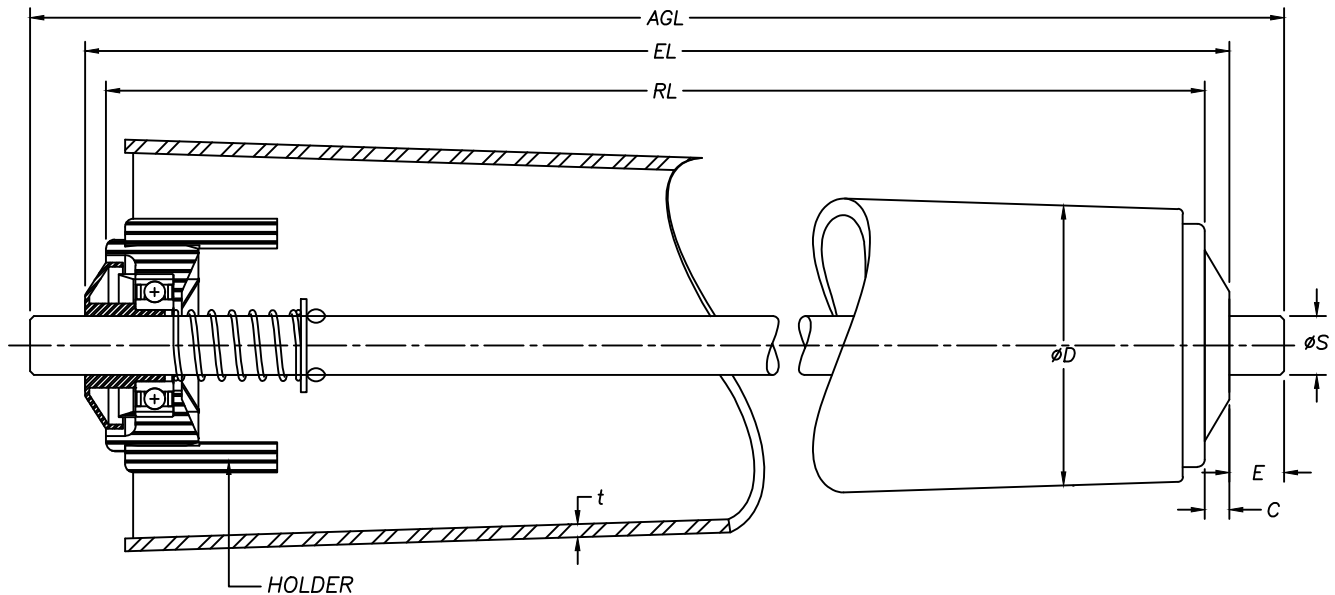

PVC PIPE

EL = AGL

LOAD CAPACITY :

Min Diameter (ϕD)	Max Diameter (ϕD)	Roller Length (RL)	C	E	ϕS	t
$\phi 54$	$\phi 71.2$	300 mm	5	12	12/14	2.6
$\phi 54$	$\phi 77.6$	350 mm	5	12	12/14	2.6
$\phi 54$	$\phi 77.6$	400 mm	5	12	12/14	2.6
$\phi 54$	$\phi 84$	450 mm	5	12	12/14	2.6
$\phi 54$	$\phi 84$	500 mm	5	12	12/14	2.6
$\phi 54$	$\phi 90.4$	550 mm	5	12	12/14	2.6
$\phi 54$	$\phi 90.4$	600 mm	5	12	12/14	2.6
$\phi 54$	$\phi 96.8$	650 mm	5	12	12/14	2.6
$\phi 54$	$\phi 96.8$	700 mm	5	12	12/14	2.6
$\phi 54$	$\phi 103.2$	750 mm	5	12	12/14	2.6
$\phi 54$	$\phi 103.2$	800 mm	5	12	12/14	2.6
$\phi 54$	$\phi 109.6$	850 mm	5	12	12/14	2.6
$\phi 54$	$\phi 109.6$	900 mm	5	12	12/14	2.6

NEWMECH ENGINEERING SDN. BHD.

(Co. No. 966425-D)

No. 53, Jln. Pendamar 27/90,
40000 Shah Alam, Selangor Darul Ehsan.
Tel : 03-5191 6280, 012-330 7338 ; Fax : 03-5191 4280
Email : newmech18@gmail.com, newmech9@gmail.com